


NI SERIES 7" BORE 3.5" ROD CYLINDER

EP7050

P1

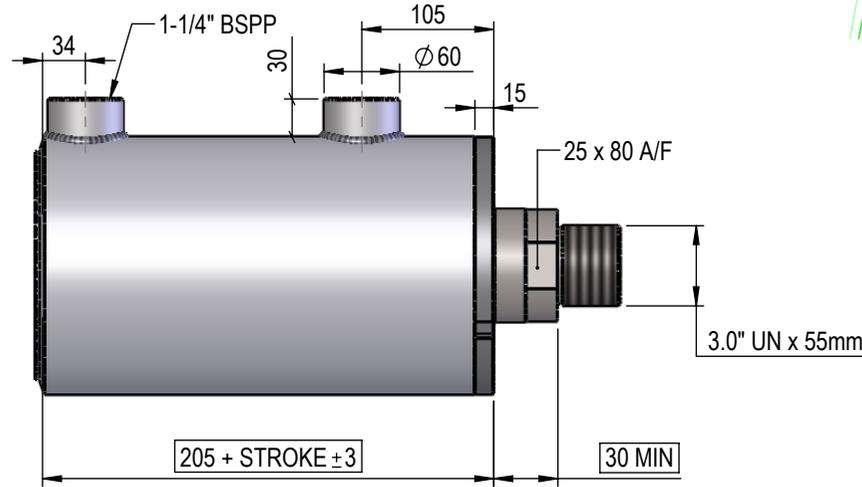



DIMENSIONS IN BOXES TO BE USED FOR BUILD LENGTH

PIN-EYE




PBC700-25I215M

HS = 111553 kg

E1

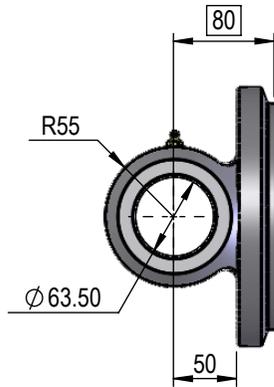

PORT POSITION

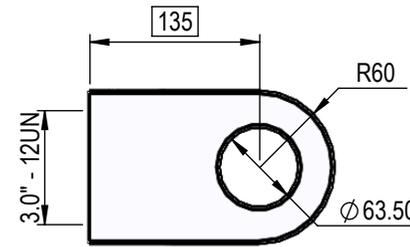


FEMALE CLEVIS

FRC070

HS = 48189 kg

C1


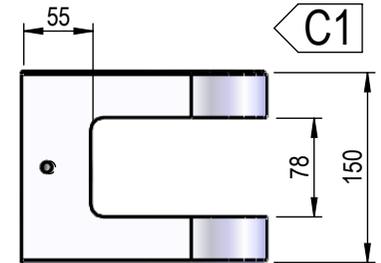


MALE LUG

EC25I100M30I + EP7050

HS = 54754 kg

M1

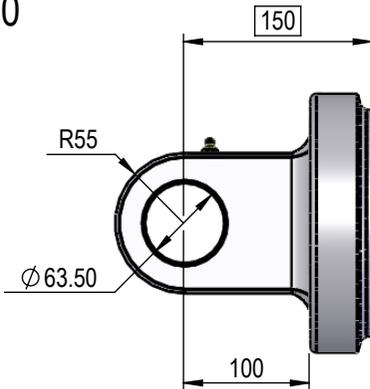
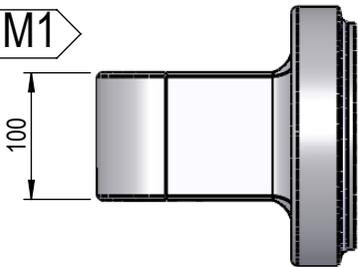


PIN-EYE


EC25I100M30I

HS = 54754 kg

E1

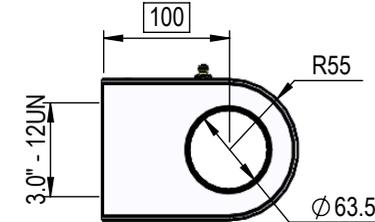

NI SERIES
7" BORE
3.5" ROD
CYLINDER

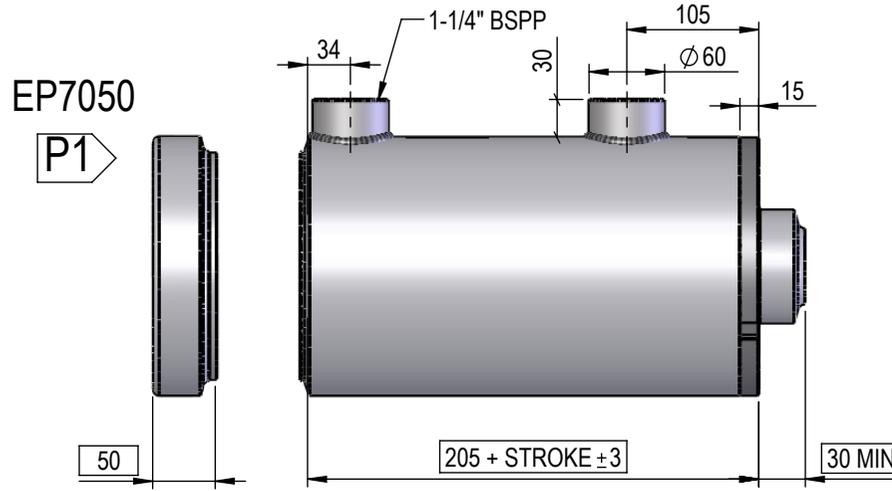



DIMENSIONS IN BOXES TO BE USED FOR BUILD LENGTH

SPHERICAL BEARING

PORT POSITION

SPHERICAL BEARING

SB-700-70
 HS = 38735 kg

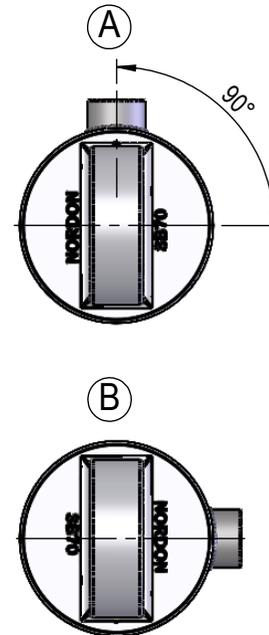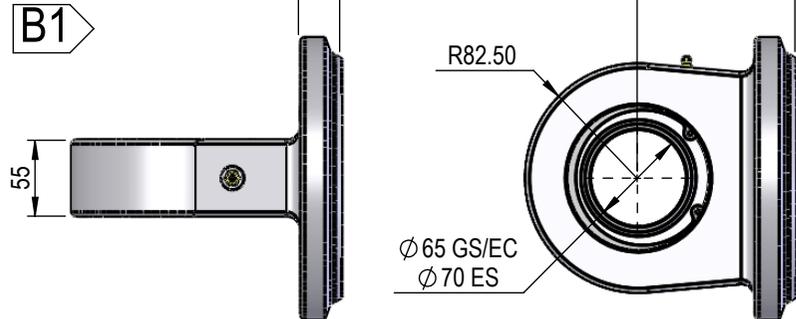

SBR70
 HS = 33481 kg

