NAP SERIES
3.25" BORE, 1.25" ROD, 1.0" PINS
REPHASING CYLINDER
B PORT POSITION

NORDON CYLINDERS Australia

55   64   12 + STROKE   69   36   75

R32.50

R28

∅ 25.40

∅ 25.40

3/4" UNO Phasing Port

3.25" Tube For Phasing Cylinder -SRB

∅ 3.75"

1.25" HT Hardchrome Shaft

BUILD LENGTH = 311 + STROKE ± 2mm

∅ 44.45   ∅ 44.45

20

45

70   30

PRO025

28   64

68

140

STROKE = _____

171
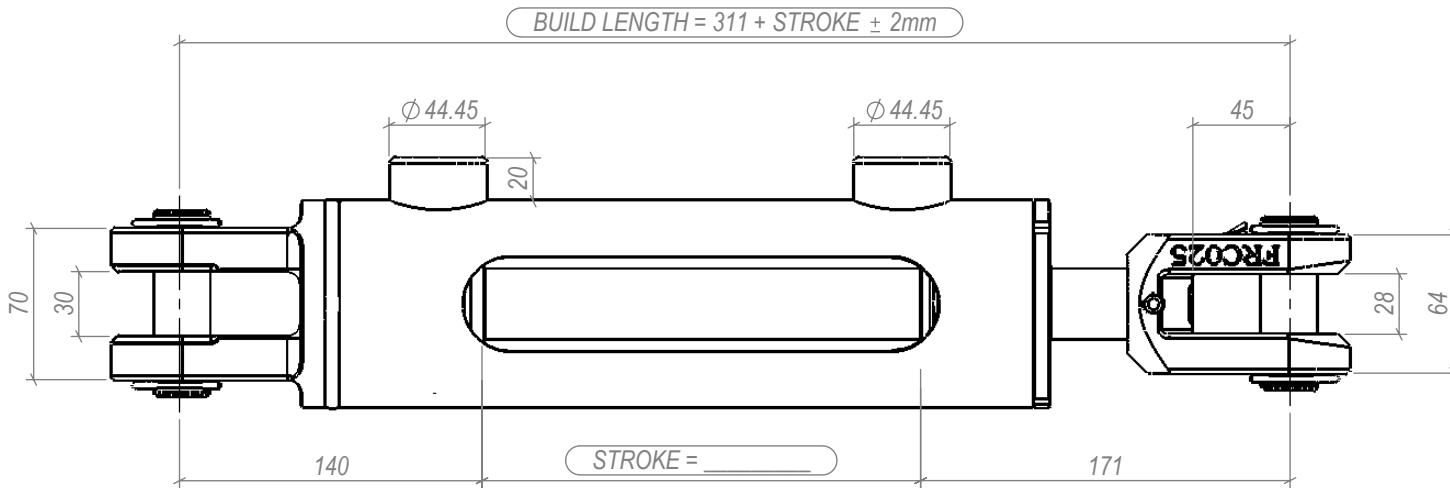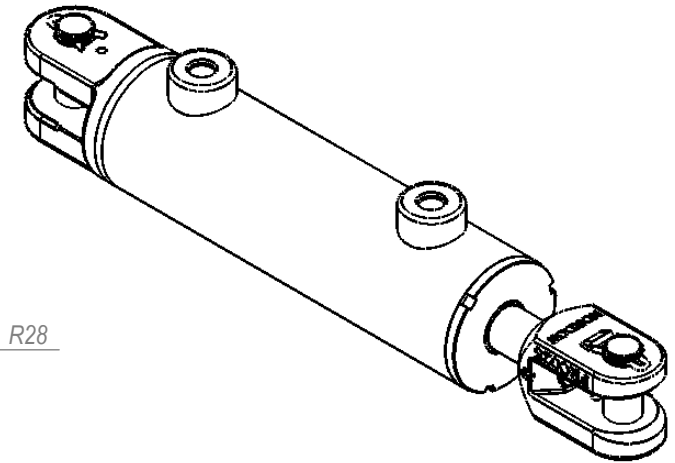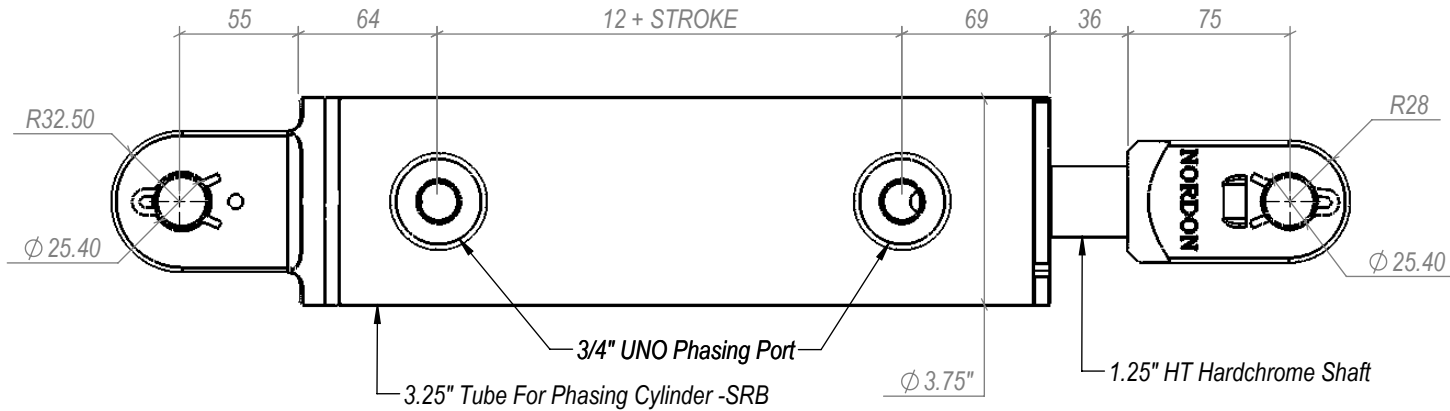
NOTE: ALL THREADS MACHINED TO 2A/B SPECIFICATION.
        ALL PIN HOLES MACHINED TO D9 TOLERANCE.

NAP32B___